

Known Issue on ANT-35000 series encoders


RTP one-way streaming sub stream selection issue

This issue was found in firmware version V3.304B01_T913 (release date April 2023) and may be present in earlier version of released firmware.

The RTP streaming from the One-way setting has a selection issue, see the image below.

From the "select video" when the "Primary Video" is selected then the streamed video will be that setup in the "Primary" setting in the "Video" section of the "Video&Audio" settings.

If either "Secondary Video#1", "Secondary Video#2" or "secondary Video#3" is selected then the streamed video will be "Secondary Video#1" which will be that setup in the "Secondary#1" setting in the "Video" section of the "Video&Audio" settings.

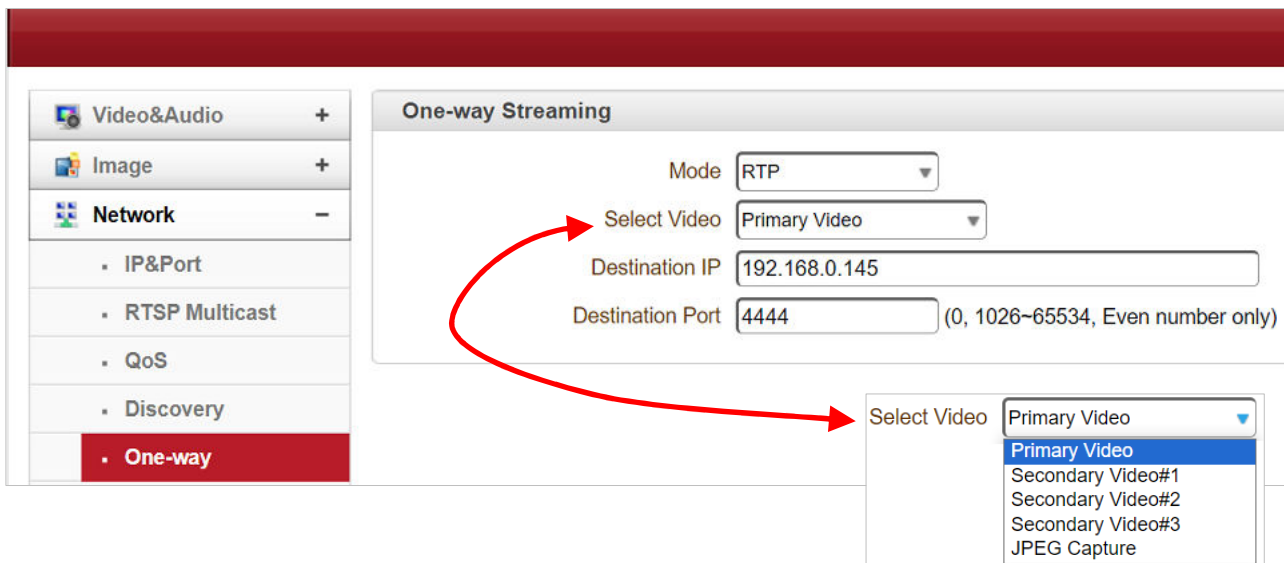

For further help and advice please contact Antrica on:
 Email: support@antrica.com
 Phone: +44 1628 626098, during UK office hours, and ask for technical support

Document info

Version	date	author	Comments
0.1	6-Feb-24	David M	Initial draft