



SpotBox4K

32 ONVIF Camera Decoder & Multi viewer

Firmware Upgrade Guide

FW 1.0.5 to FW 1.0.6
15th June 2017

Upgrading Firmware - Step by Step

1) Using a web browser (Google Chrome recommended) browse to the SpotBox (ANT-37000)

Default address <http://192.168.0.222>

If you have a V1.0.5 Firmware or Beta 1.0.6 (beta=dates prior to 15th June 2017) you will need to use port 8080

e.g <http://192.168.0.222:8080>


After this upgrade port 8080 is replaced by port 80, hence no need to add this to the URL (<http://192.168.0.222>)

2) Log in using username and password


Default Username/Password: **admin/admin**

3) Browse to the **SYSTEM** page and select **SYSTEM UPDATE - choose file.**

You may select the Spotboxfirmware which will look something like this **spotbox-update_nano2_release.swu**

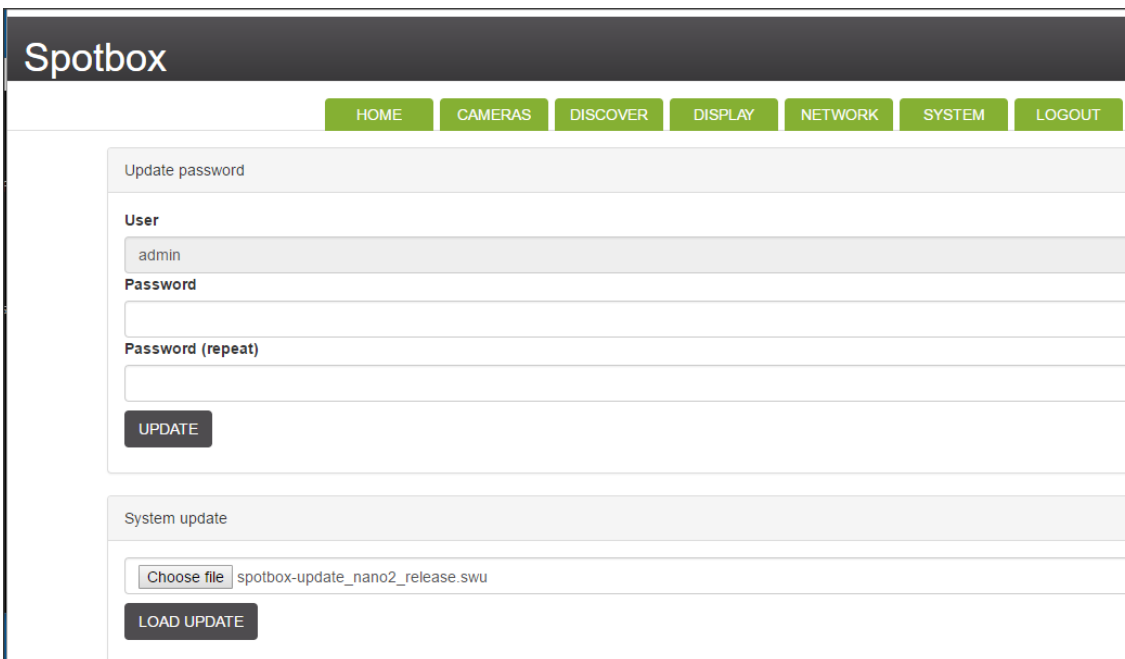


4) Click Load Update and you will see a Green Progress Bar

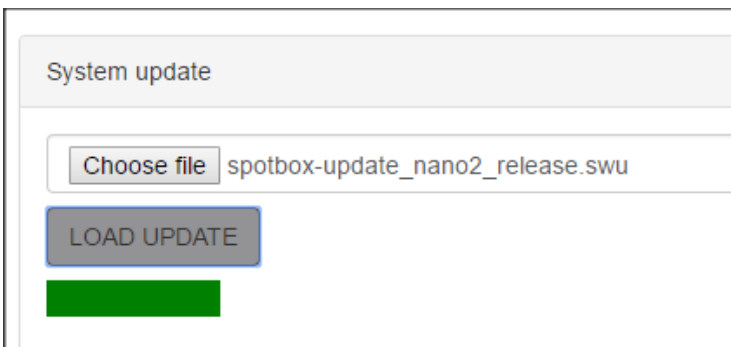

Upgrading Firmware - Step by Step

5) After the Green Progress bar has finished you should see this message -Click OK

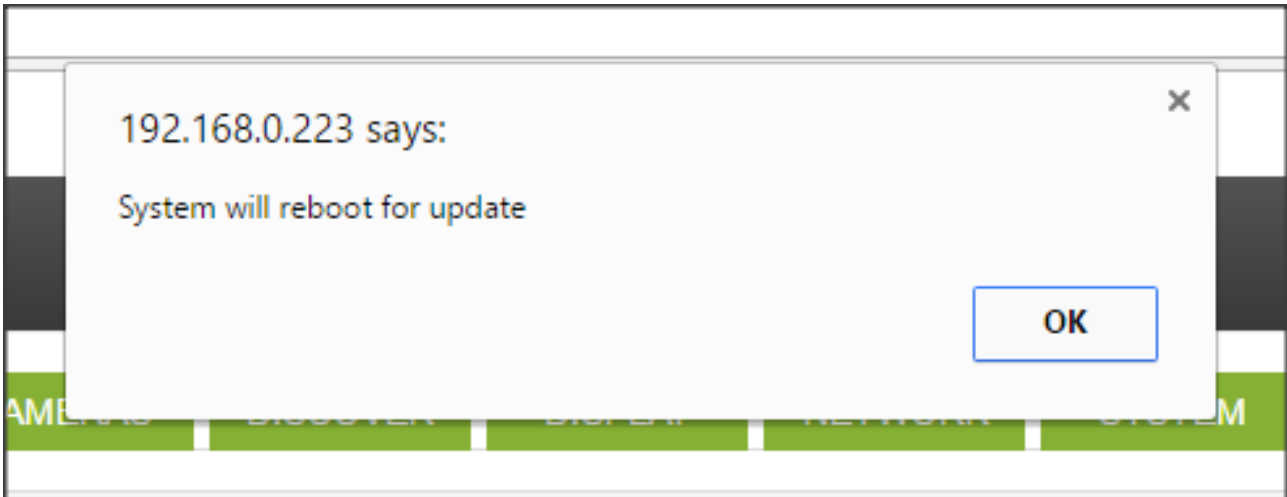

6) After a few moments on your LCD screen this message should appear. Reboot the box and you should see the Quad view screen showing 4 cameras with red writing and the version of firmware 1.0.6 .The upgrade is successful



Upgrading Firmware - If things go Wrong

If you do not see some or all the screens in the previous section please do the following:

- A) Wait 2 minutes and Reboot the box, if this does not resolve the issue or you have nothing on screen do a system reset as follows:
- B) Unplug power from Spotbox, press the red rectangular button on remote and HOLD it. Keep Holding it and power up the box...keep holding the button. Eventually you will see a Logo with Full System Reset - release the button and Reboot the box.
- C) If the firmware did not upgrade try resetting the browser, empty the cache and browser history and try again.
- D) If you did not see any Green progress during firmware upgrade try resetting the browser or use Google Chrome which is a proven browser with spot box.

If all else fails call:

+44 1628 626098 press 3 for technical support

send an email to support@antrica.com