





### ANT-1771, 1772 & 1773 FIRMWARE UPGRADE FROM MICRO SD CARD GUIDE

*Please note this will factory default the board*

- 1) Format the Micro-SD card to **FAT32 (MS-DOS for Mac)**
- 2) Place the 3 files (shown below) from the link onto the formatted Micro-SD card - [Firmware Link](#).

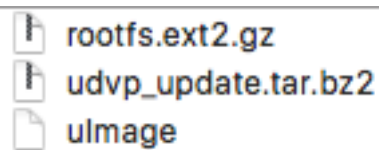

- 3) De-power the ANT-1771/2/3 device **before** placing in the Micro-SD card.
- 4) Power Up the ANT-1771/2/3 device with the SD card attached, and ethernet connectivity.

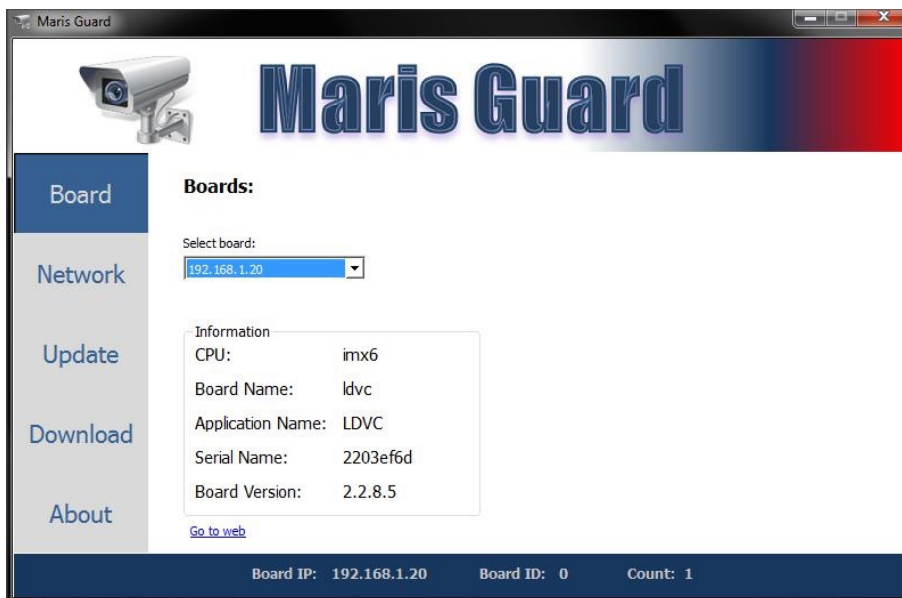

- 5) Using Neptune Guard to find the board once the update is complete (*approx 2-3 minutes to update*).

*Please be aware once the file **udvp\_update.tar.bz2** has been used once it re-names to **udvp\_update.tar.bz2.old** this is a firmware update looping prevention method, to reuse simply remove the **.old** extension.*