



3. Wait until they are booted
4. Run True Manager then select IP discovery - see Figure 1.

Figure 1 : IP discovery

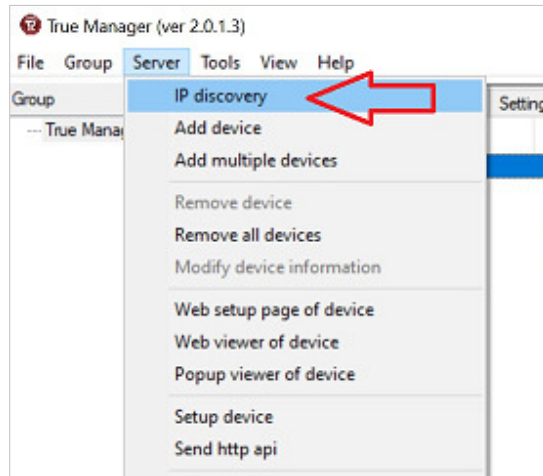


5. This will produce a list of the Truen products on the network, but the ANT-36000M are at default setting so all appear on IP address 192.168.10.100 – see Figure 2. "OK" the "IP collision detected message"

Figure 2 : discovered equipment

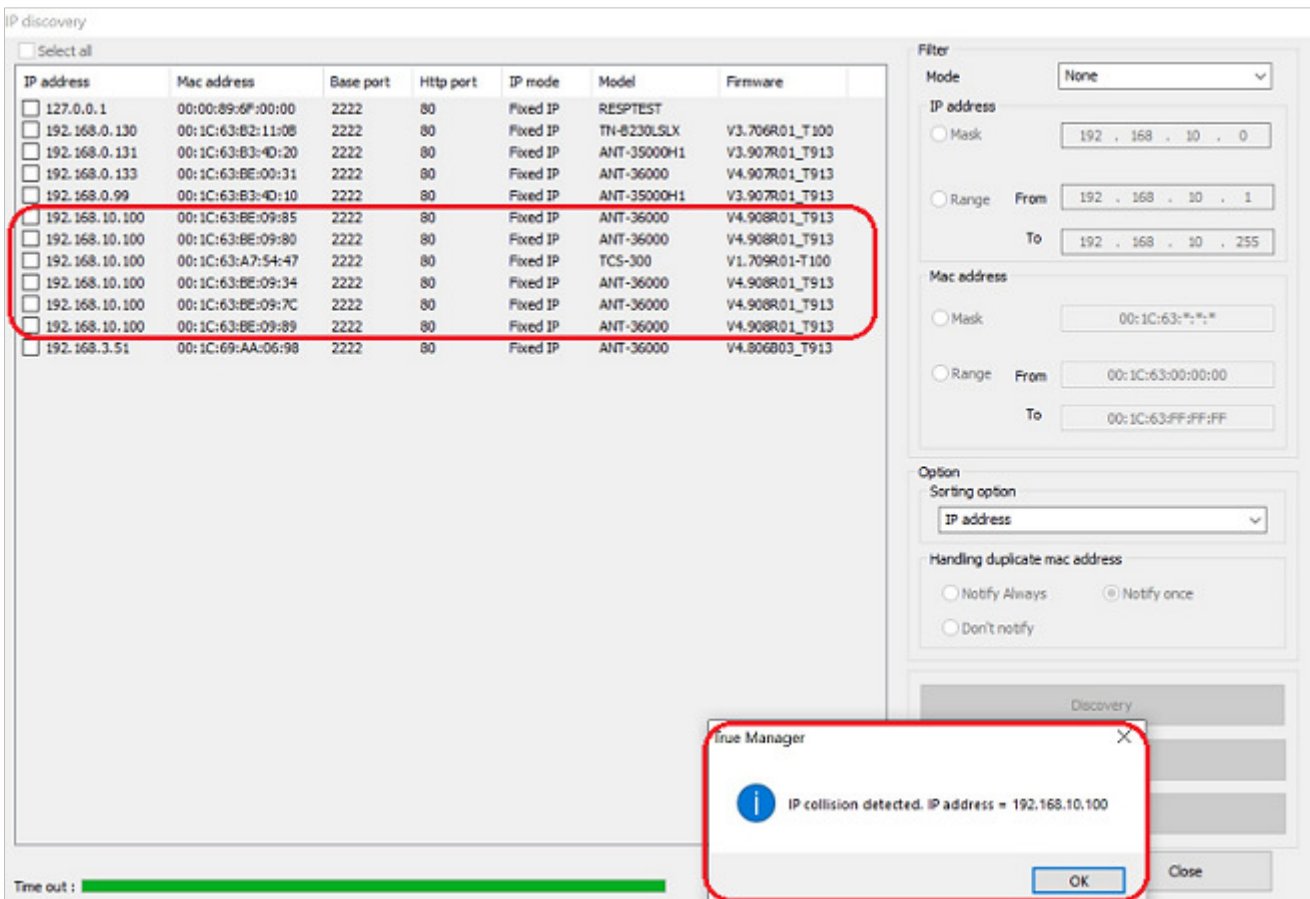


6. Using the image in Figure 3 as a guide
 - 6.1. Select / tick the devices required to be upgraded
 - 6.2. Select "IP change"
 - 6.3. Set the settings in "Ip change" pop-up windows. i.e. Select Sequential and ensure the Gateway is in the same range as the IP address
 - 6.4. Click "Change"

Figure 3 : select units and new IP address setting

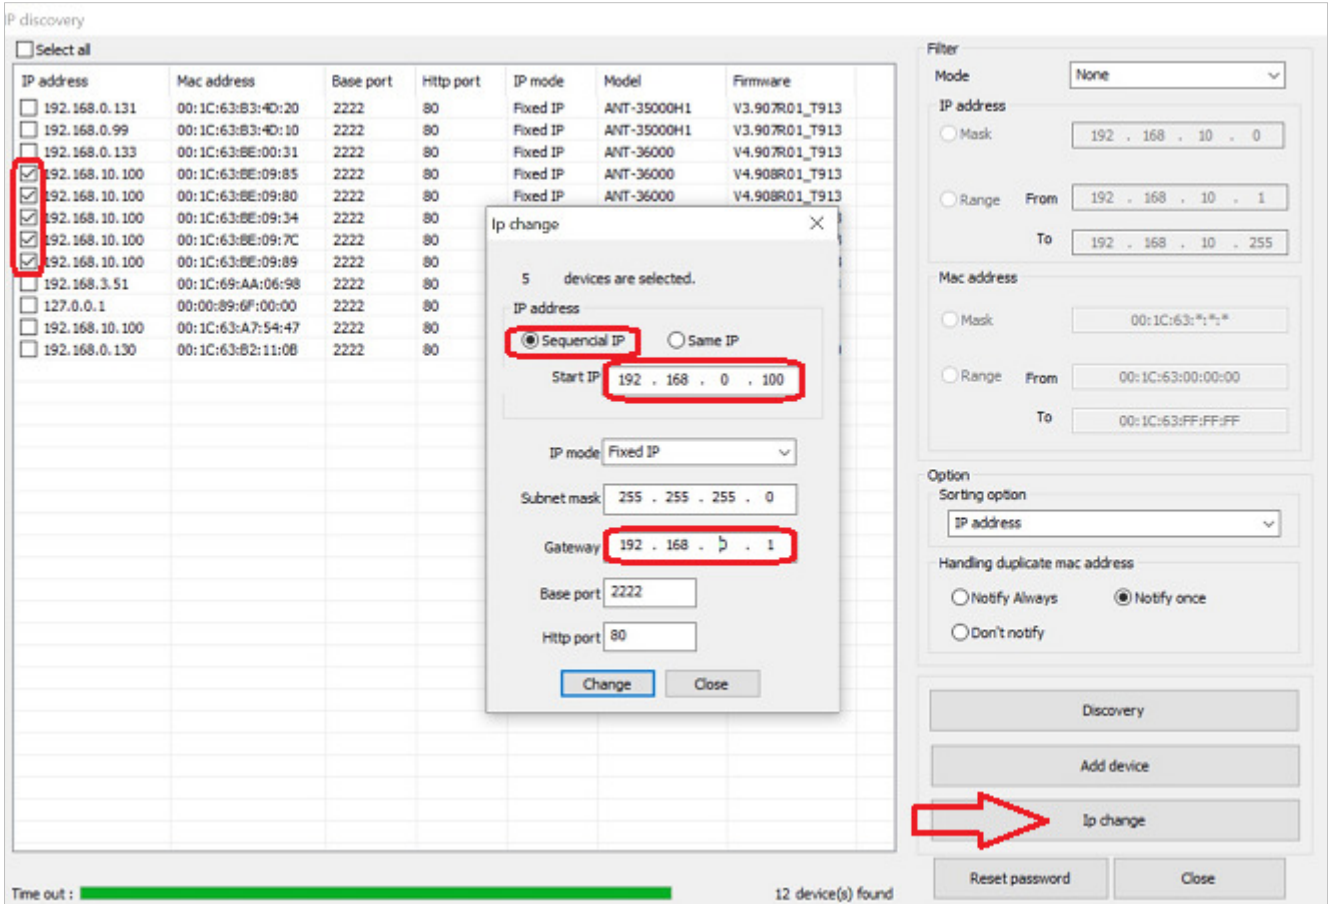

7. The pop-up shown in Figure 4 indicates that the units have had their IP address changed

Figure 4 : pop-up show units have had their IP addresses changed

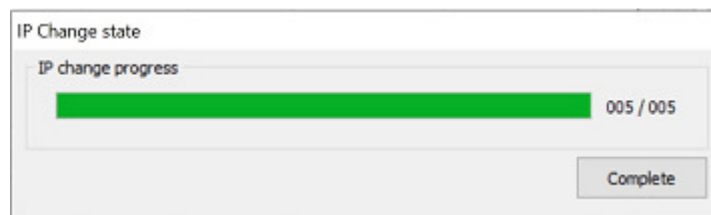

8. Click "discovery" to show the new IP addresses of the devices, as shown in Figure 5.

Figure 5 : discover new IP address of devices

IP discovery

Select all

IP address	Mac address	Base port	Http port	IP mode	Model	Firmware
<input type="checkbox"/> 127.0.0.1	00:00:89:6E:00:00	2222	80	Fixed IP	RFSPTTEST	
<input type="checkbox"/> 192.168.0.100	00:1C:63:BE:09:85	2222	80	Fixed IP	ANT-36000	V4.908R01_T913
<input type="checkbox"/> 192.168.0.101	00:1C:63:BE:09:80	2222	80	Fixed IP	ANT-36000	V4.908R01_T913
<input type="checkbox"/> 192.168.0.102	00:1C:63:BE:09:34	2222	80	Fixed IP	ANT-36000	V4.908R01_T913
<input type="checkbox"/> 192.168.0.103	00:1C:63:BE:09:7C	2222	80	Fixed IP	ANT-36000	V4.908R01_T913
<input type="checkbox"/> 192.168.0.104	00:1C:63:BE:09:89	2222	80	Fixed IP	ANT-36000	V4.908R01_T913
<input type="checkbox"/> 192.168.0.130	00:1C:63:B2:11:08	2222	80	Fixed IP	TN-B230LSLX	V3.706R01_T100
<input type="checkbox"/> 192.168.0.131	00:1C:63:B3:4D:20	2222	80	Fixed IP	ANT-35000H1	V3.907R01_T913
<input type="checkbox"/> 192.168.0.133	00:1C:63:BE:00:31	2222	80	Fixed IP	ANT-36000	V4.907R01_T913
<input type="checkbox"/> 192.168.0.99	00:1C:63:B3:4D:10	2222	80	Fixed IP	ANT-35000H1	V3.907R01_T913
<input type="checkbox"/> 192.168.10.100	00:1C:63:A7:54:47	2222	80	Fixed IP	TCS-300	V1.709R01-T100
<input type="checkbox"/> 192.168.3.51	00:1C:69:AA:06:98	2222	80	Fixed IP	ANT-36000	V4.806B03_T913

Filter

Mode:

IP address

Mask:

Range: From To

Mac address

Mask:

Range: From To

Option

Sorting option:


Handling duplicate mac address

Notify Always Notify once Don't notify

Time out : 12 device(s) found

9. To add the devices to True Manager "main" window.
 - 9.1. Select / tick the ANT-36000 to be added
 - 9.2. Select "Add device"
 - 9.3. In the pop-up "Add device" window, click "OK"
 - 9.4. Close the "IP discovery" window

Figure 6 : discover new IP address of devices

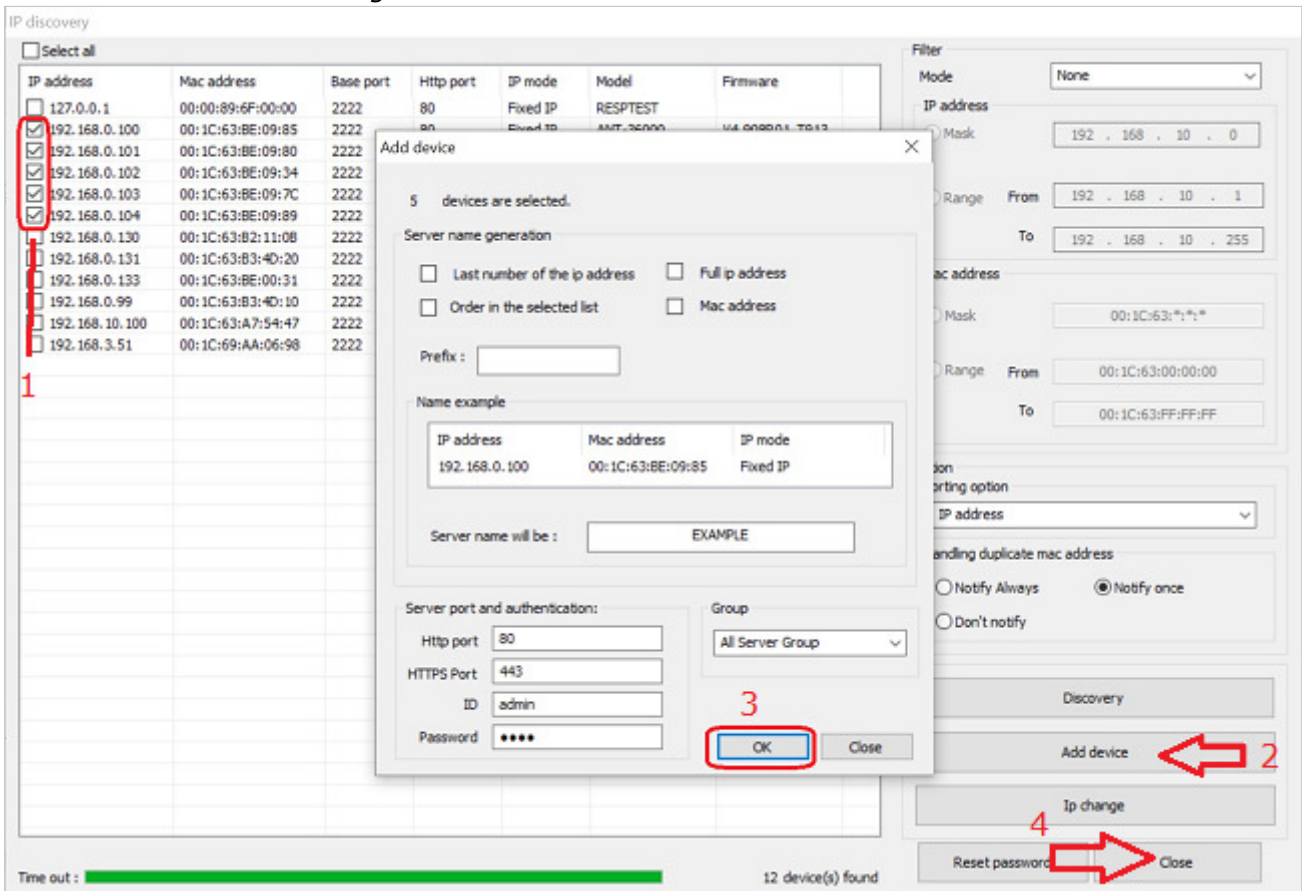

10. Select devices to be upgraded, as shown in Figure 7.

Figure 7 : select devices to be upgraded

